

HWACHEON

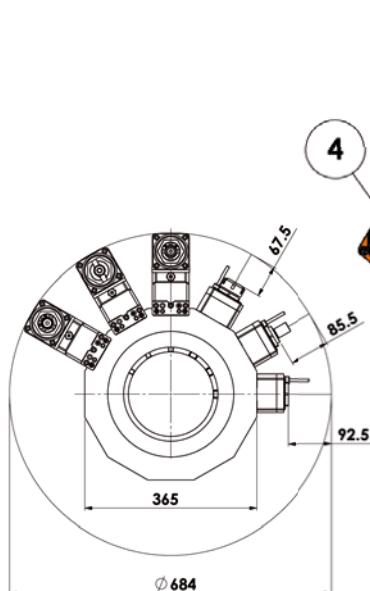
MODELLO TORNO
MASCHINEN MODELL

HI TECH 250



VDI - 40

MANDRINO PRINCIPALE
HAUPTSPINDEL

MANDRINO SECONDARIO
GEGENSPINDEL








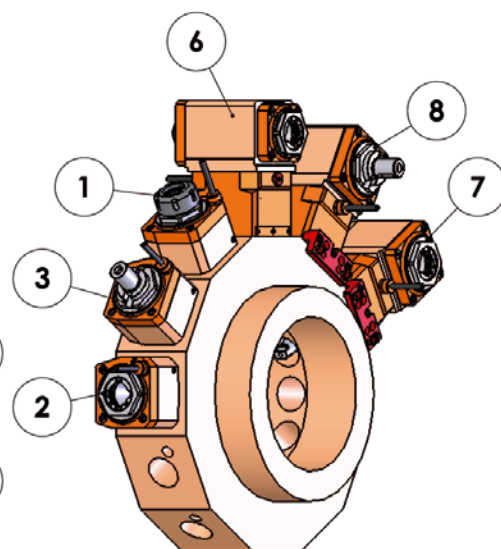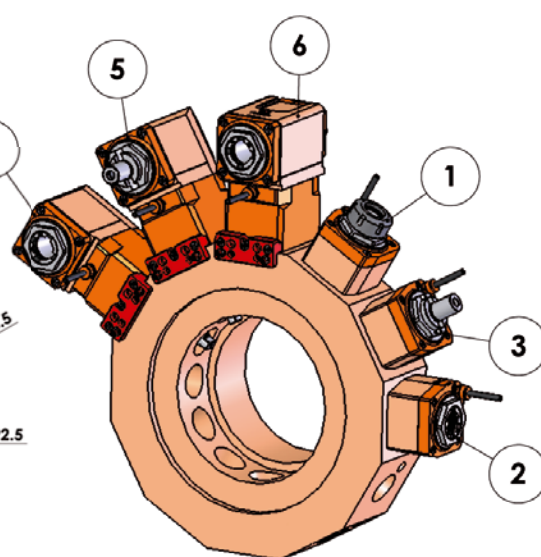DIAMETRO ROTAZIONE MAX
MAX. ROTATIONS DURCHMESSER /
SCHWINGKREIS



F: GHIERA INTERNA / INTERNE SPANNZANGE

MODELLO MODELL	LAVORAZIONE OPERATION	PINZA SPANNZANGE	VELOCITÀ (giri/min) DREHZAHL (U/Min.)	COPPIA DREHMOMENT (Nm)	RAPPORTO ÜBERSETZUNG	H (mm)	LUNGHEZZA UTENSILE WERKZEUGLÄNGE	REFRIGERAZIONE KÜHLSCHMIER- MITTEL	CODICE TEILE NUMMER
1 	LT-S RADIALE RADIAL $r_1 = r_2$	ER32 (Ø 3-20)	6000	63	1:1	92	67.5	esterna extern	05102200
2 	LT-S RADIALE RADIAL $r_1 = r_2$	ER32-F (Ø 3-20)	6000	63	1:1	67	92.5	esterna extern	05102100
3 	LT-S RADIALE RADIAL $r_1 = r_2$	DIN 138-22 (Ø 22)	6000	63	1:1	74	85.5	esterna extern	05102300

MODELLO MODELL	LAVORAZIONE OPERATION	PINZA SPANNZANGE	VELOCITÀ (giri/min) DREHZAHL (U/Min.)	COPPIA DREHMOMENT (Nm)	RAPPORTO ÜBERSETZUNG	H (mm)	LUNGHEZZA UTENSILE WERKZEUGLÄNGE	REFRIGERAZIONE KÜHLSCHMIER- MITTEL	CODICE TEILE NUMMER
4 	LT-A ASSIALE AXIAL $r_1 = r_2$	ER32-F (Ø 3-20)	6000	63	1:1	120	-	esterna extern	05102700
5 	LT-A ASSIALE AXIAL $r_1 = r_2$	DIN 138-22 (Ø 22)	6000	63	1:1	120	-	esterna extern	05102900
6 	LT-A ASSIALE AXIAL $r_1 = r_2$ r_1 contrario umgekehrt r_3	ER32-F (Ø 3-20)	6000	63	1:1	120	-	esterna extern	05103100
7 	LT-A ASSIALE AXIAL $r_1 = r_2$	ER32-F (Ø 3-20)	6000	63	1:1	120	-	esterna extern	05102800
8 	LT-A ASSIALE AXIAL $r_1 = r_2$	DIN 138-22 (Ø 22)	6000	63	1:1	120	-	esterna extern	05103000

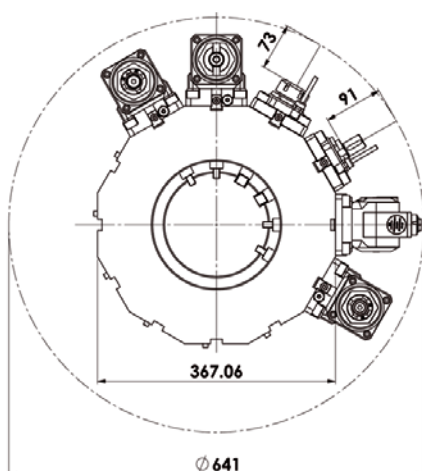
HWACHEON

MODELLO TORNIO
MASCHINEN MODELL


HI TECH 200 / CUTEX 240 / T2

BMT - 65




MANDRINO PRINCIPALE E SECONDARIO
HAUPTSPINDEL / GEGENSPINDEL






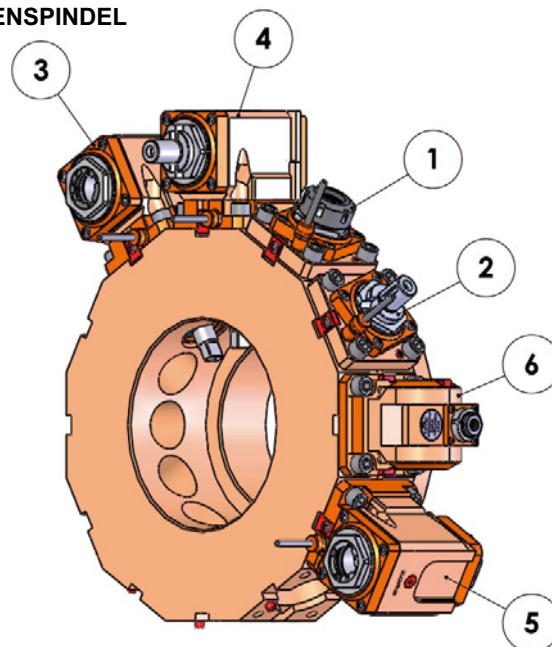DIAMETRO ROTAZIONE MAX
MAX. ROTATIONS DURCHMESSER / SCHWINGKREIS



F: GHIERA INTERNA / INTERNE SPANNZANGE

MODELLO MODELL	LAVORAZIONE OPERATION	PINZA SPANNZANGE	VELOCITÀ (giri/min) DREHZAHL (U/Min.)	COPPIA DREHMOMENT (Nm)	RAPPORTO ÜBERSETZUNG	H (mm)	LUNGHEZZA UTENSILE WERKZEUGLÄNGE	REFRIGERAZIONE KÜHLSCHMIER- MITTEL	CODICE TEILE NUMMER
1 	LT-S RADIALE RADIAL $r_1 = r_2$	ER32 (Ø 3-20)	6000	63	1:1	64	73	esterna extern	05100100
2 	LT-S RADIALE RADIAL $r_1 = r_2$	DIN 138-22 (Ø 22)	6000	63	1:1	46	91	esterna extern	05100300
3 	LT-A ASSIALE AXIAL $r_1 = r_2$	ER32-F (Ø 3-20)	6000	63	1:1	72	-	esterna extern	05100200

MODELLO MODELL	LAVORAZIONE OPERATION	PINZA SPANNZANGE	VELOCITÀ (giri/min) DREHZAHL (U/Min.)	COPPIA DREHMOMENT (Nm)	RAPPORTO ÜBERSETZUNG	H (mm)	LUNGHEZZA UTENSILE WERKZEUGLÄNGE	REFRIGERAZIONE KÜHLSCHMIER- MITTEL	CODICE TEILE NUMMER
4 	LT-A ASSIALE AXIAL $r_1 = r_2$	DIN 138-22 (Ø 22)	6000	63	1:1	72	-	esterna extern	05100400
5 	LT-A ASSIALE AXIAL $r_1 = r_2$ r_1 contrario umgekehrt r_3	ER32-F (Ø 3-20)	6000	63	1:1	72	-	esterna extern	05101000
6 	LT-T ASSIALE AXIAL RADIALE RADIAL r_1 contrario umgekehrt r_2	ER16-F (Ø 1-10)	4000	13	1:1	132	-	esterna extern	05102000

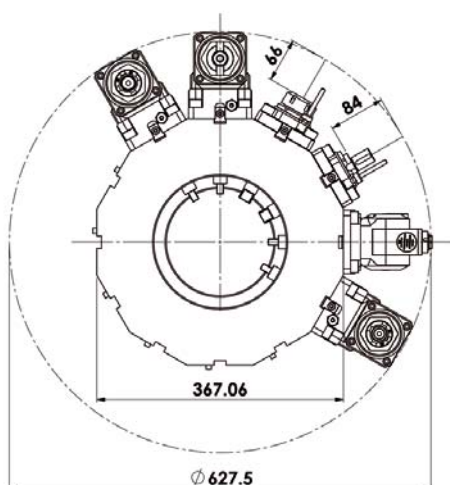
HWACHEON

MODELLO TORNO
MASCHINEN MODELL


HI TECH 300 / HI TECH 400

BMT - 65

MANDRINO PRINCIPALE E SECONDARIO
HAUPTSPINDEL / GEGENSPINDEL






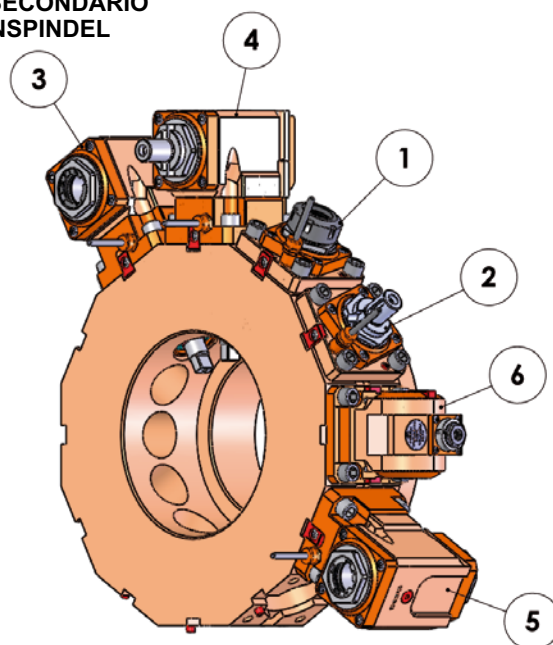DIAMETRO ROTAZIONE MAX
MAX. ROTATIONS DURCHMESSER / SCHWINGKREIS



F: GHIERA INTERNA / INTERNE SPANNZANGE

MODELLO MODELL	LAVORAZIONE OPERATION	PINZA SPANNZANGE	VELOCITÀ (giri/min) DREHZAHL (U/Min.)	COPPIA DREHMOMENT (Nm)	RAPPORTO ÜBERSETZUNG	H (mm)	LUNGHEZZA UTENSILE WERKZEUGLÄNGE	REFRIGERAZIONE KÜHLSCHMIER- MITTEL	CODICE TEILE NUMMER
1 	LT-S RAZIALE RADIAL $r_1 = r_2$	ER32 (Ø 3-20)	6000	63	1:1	64	66	esterna extern	05100100
2 	LT-S RAZIALE RADIAL $r_1 = r_2$	DIN 138-22 (Ø 22)	6000	63	1:1	46	84	esterna extern	05100300
3 	LT-A ASSIALE AXIAL $r_1 = r_2$	ER32-F (Ø 3-20)	6000	63	1:1	90	-	esterna extern	05100500

MODELLO MODELL	LAVORAZIONE OPERATION	PINZA SPANNZANGE	VELOCITÀ (giri/min) DREHZAHL (U/Min.)	COPPIA DREHMOMENT (Nm)	RAPPORTO ÜBERSETZUNG	H (mm)	LUNGHEZZA UTENSILE WERKZEUGLÄNGE	REFRIGERAZIONE KÜHLSCHMIER- MITTEL	CODICE TEILE NUMMER
4 	LT-A ASSIALE AXIAL $r_1 = r_2$	DIN 138-22 (Ø 22)	6000	63	1:1	90	-	esterna extern	05100600
5 	LT-A ASSIALE AXIAL $r_1 = r_2$ r_1 contrario umgekehrt r_3	ER32-F (Ø 3-20)	6000	63	1:1	90	-	esterna extern	05101100
6 	LT-T ASSIALE AXIAL RADIALE RADIAL r_1 contrario umgekehrt r_3	ER16-F (Ø 1-10)	4000	13	1:1	132	-	esterna extern	05102000


HWACHEON

MODELLO TORNO
MASCHINEN MODELL


VT 1150

BMT - 75



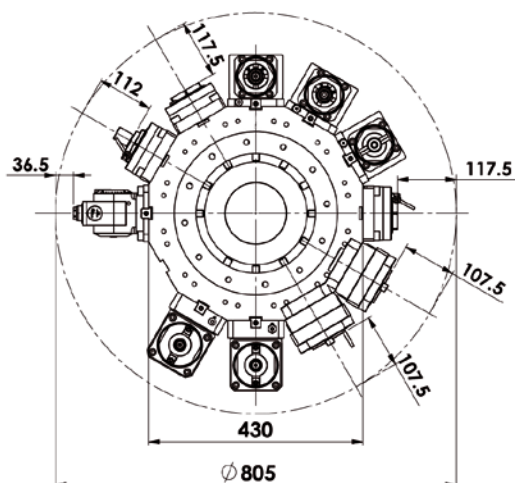
MANDRINO PRINCIPALE
HAUPTSPINDEL







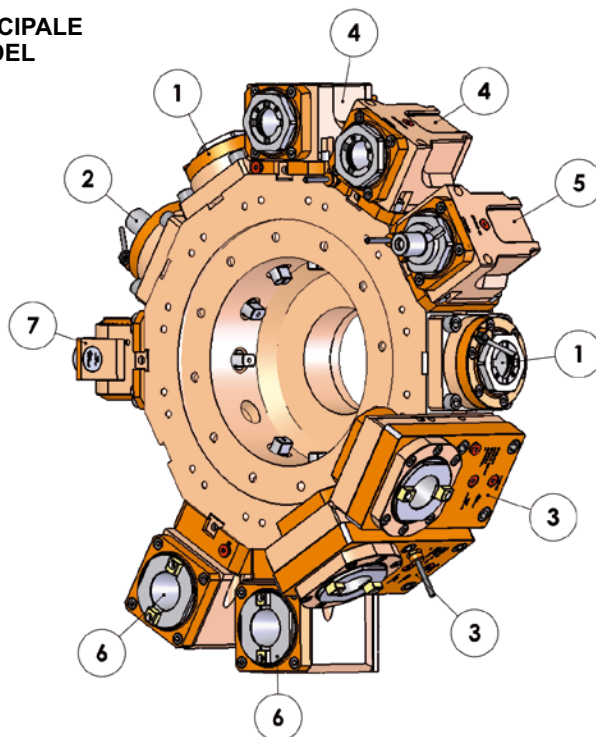DIAMETRO ROTAZIONE MAX
MAX. ROTATIONS DURCHMESSER / SCHWINGKREIS



F: GHIERA INTERNA / INTERNE SPANNZANGE

MODELLO MODELL	LAVORAZIONE OPERATION	PINZA SPANNZANGE	VELOCITÀ (giri/min) DREHZAHL (U/Min.)	COPPIA DREHMOMENT (Nm)	RAPPORTO ÜBERSETZUNG	H (mm)	LUNGHEZZA UTENSILE WERKZEUGLÄNGE	REFRIGERAZIONE KÜHLSCHMIER- MITTEL	CODICE TEILE NUMMER
1 	NEW LT-S RADIALE RADIAL $r_1 = r_2$	ER40-F (Ø 4-26)	4000	100	1:1	70	117.5	esterna extern	05123100
		ER40-F (Ø 4-26)	4000	100	1:1	70	117.5	int. / est. int. / ext.	05123200
2 	NEW LT-S RADIALE RADIAL $r_1 = r_2$	DIN 138-27 (Ø 27)	4000	100	1:1	75.5	112	esterna extern	05123600
3 	NEW LT-S OFS RADIALE RADIAL r_1 contrario umgekehrt r_2	ISO-BT 40	4000	180	1:1	80	107.5	esterna extern	05123800
		ISO-BT 40	4000	180	1:1	80	107.5	int. / est. int. / ext.	05123700

MODELLO MODELL	LAVORAZIONE OPERATION	PINZA SPANNZANGE	VELOCITÀ (giri/min) DREHZAHL (U/Min.)	COPPIA DREHMOMENT (Nm)	RAPPORTO ÜBERSETZUNG	H (mm)	LUNGHEZZA UTENSILE WERKZEUGLÄNGE	REFRIGERAZIONE KÜHLSCHMIER- MITTEL	CODICE TEILE NUMMER
4 	LT-A ASSIALE AXIAL $r_1 = r_2$	ER40-F (Ø 4-26)	4000	80	1:1	60	-	esterna extern	05123300
		ER40-F (Ø 4-26)	4000	80	1:1	60	-	int. / est. int. / ext.	05123400
5 	LT-A ASSIALE AXIAL $r_1 = r_2$	DIN 138-27 (Ø 27)	4000	80	1:1	60	-	esterna extern	05123500
6 	LT-A ASSIALE AXIAL $r_1 = r_2$	ISO-BT 40	4000	180	1:1	90	-	esterna extern	05123900
		ISO-BT 40	4000	180	1:1	90	-	int. / est. int. / ext.	05124000
7 	LT-T ASSIALE AXIAL RADIALE RADIAL r_1 contrario umgekehrt r_2	ER20-F (Ø 2-13)	3000	20	1:1	151	36.5	esterna extern	05124500