

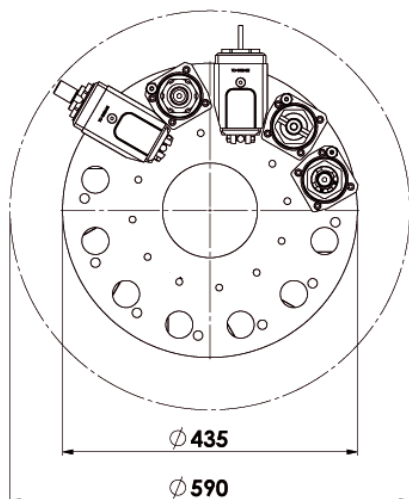
HYUNDAI - KIA

MODELLO TORNO
MASCHINEN MODELL


SKT 15 LM / SKT 15 LMS (DIN 5482)
SKT 21 LM / SKT 21 LMS (DIN 5482)
SKT 28 LM / SKT 250 SY

VDI - 40

TORRETTA FRONTALE
FRONTALER REVOLVER





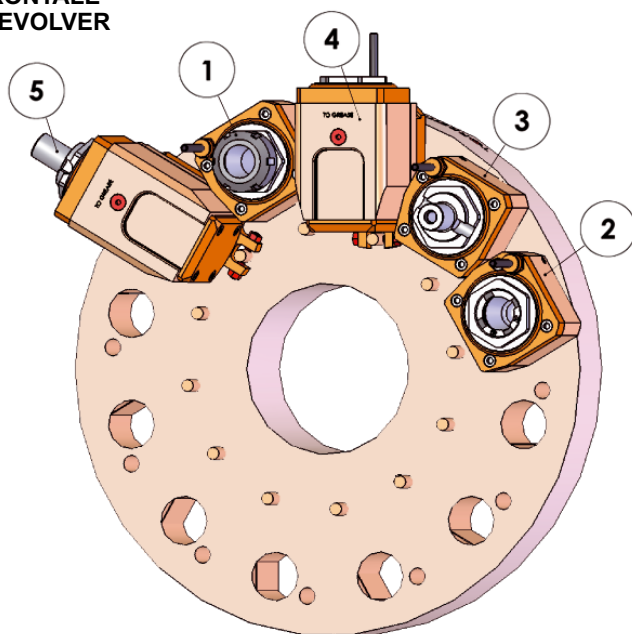DIAMETRO ROTAZIONE
ROTATIONS DURCHMESSER / SCHWINGKREIS



F: GHIERA INTERNA / INTERNE SPANNZANGE

MODELLO MODELL	LAVORAZIONE OPERATION	PINZA SPANNZANGE	VELOCITÀ (giri/min) DREHZAHL (U/Min.)	COPPIA DREHMOMENT (Nm)	RAPPORTO ÜBERSETZUNG	H (mm)	LUNGHEZZA UTENSILE WERKZEUGLÄNGE	REFRIGERAZIONE KÜHLSCHMIER- MITTEL	CODICE TEILE NUMMER
1 	LT-S ASSIALE AXIAL $r_1 = r_2$	ER32 (Ø 3-20)	6000	63	1:1	92	-	esterna extern	05180100
2 	LT-S ASSIALE AXIAL $r_1 = r_2$	ER32-F (Ø 3-20)	6000	63	1:1	67	-	esterna extern	05180000
3 	LT-S ASSIALE AXIAL $r_1 = r_2$	DIN 138-22 (Ø 22)	6000	63	1:1	74	-	esterna extern	05180200

MODELLO MODELL	LAVORAZIONE OPERATION	PINZA SPANNZANGE	VELOCITÀ (giri/min) DREHZAHL (U/Min.)	COPPIA DREHMOMENT (Nm)	RAPPORTO ÜBERSETZUNG	H (mm)	LUNGHEZZA UTENSILE WERKZEUGLÄNGE	REFRIGERAZIONE KÜHLSCHMIER- MITTEL	CODICE TEILE NUMMER
4 	LT-A RADIALE RADIAL $r_1 = r_2$	ER32-F (Ø 3-20)	6000	63	1:1	70	-	esterna extern	05130200
5 	LT-A RADIALE RADIAL $r_1 = r_2$	DIN 138-22 (Ø 22)	6000	63	1:1	70	-	esterna extern	05130400

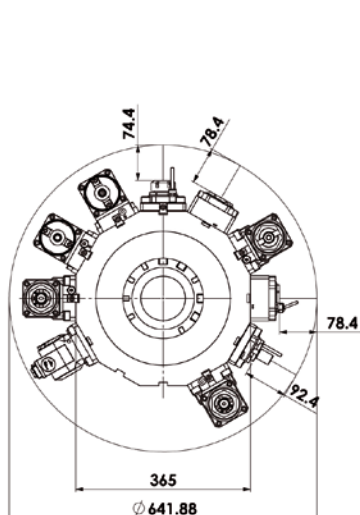
HYUNDAI - KIA

MODELLO TORNO
MASCHINEN MODELL



SKT 250 MS / SKT 300 MS
SKT 200 TTSY / SKT 250 TTSY
SKT V5 R LM

BMT - 65

MANDRINO PRINCIPALE E SECONDARIO
HAUPTSPINDEL / GEGENSPINDEL








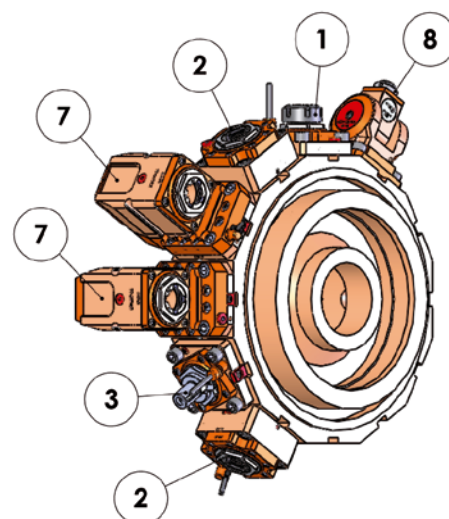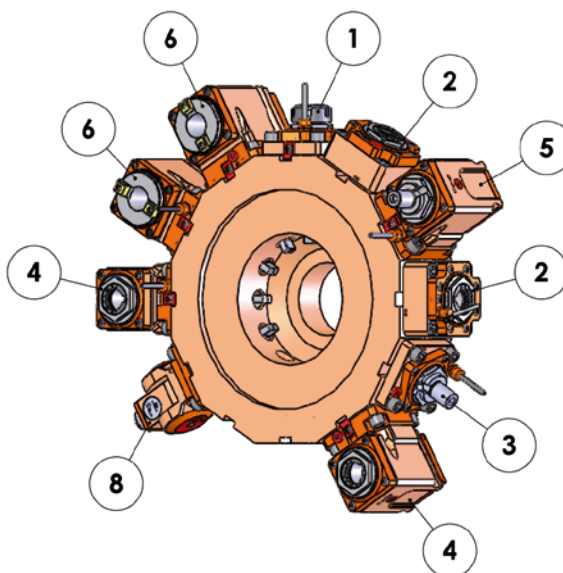DIAMETRO ROTAZIONE MAX
MAX. ROTATIONS-DURCHMESSER /
SCHWINGKREIS



F: GHIERA INTERNA / INTERNE SPANNZANGE

MODELLO MODELL	LAVORAZIONE OPERATION	PINZA SPANNZANGE	VELOCITÀ (giri/min) DREHZAHL (U/Min.)	COPPIA DREHMOMENT (Nm)	RAPPORTO ÜBERSETZUNG	H (mm)	LUNGHEZZA UTENSILE WERKZEUGLÄNGE	REFRIGERAZIONE KÜHLSCHMIER- MITTEL	CODICE TEILE NUMMER
1 	LT-S RADIALE RADIAL $r_1 = r_2$	ER32 (Ø 3-20)	6000	63	1:1	64	74.5	esterna extern	05100100
2 	LT-S RADIALE RADIAL $r_1 = r_2$	ER32-F (Ø 3-20)	6000	70	1:1	60	78.5	esterna extern	05121600
		ER32-F (Ø 3-20)	6000	70	1:1	60	78.5	int. / est. int. / ext.	05121700
3 	LT-S RADIALE RADIAL $r_1 = r_2$	DIN 138-22 (Ø 22)	6000	63	1:1	46	92.5	esterna extern	05100300

MODELLO MODELL	LAVORAZIONE OPERATION	PINZA SPANNZANGE	VELOCITÀ (giri/min) DREHZAHL (U/Min.)	COPPIA DREHMOMENT (Nm)	RAPPORTO ÜBERSETZUNG	H (mm)	LUNGHEZZA UTENSILE WERKZEUGLÄNGE	REFRIGERAZIONE KÜHLSCHMIER- MITTEL	CODICE TEILE NUMBER
	LT-A	ER32-F (Ø 3-20)	6000	63	1:1	72	-	esterna extern	05100200
	ASSIALE AXIAL $r_1 = r_2$	ER32-F (Ø 3-20)	6000	63	1:1	72	-	int. / est. int. / ext.	05122200
	LT-A	DIN 138-22 (Ø 22)	6000	63	1:1	72	-	esterna extern	05100400
	LT-A	ISO-BT 30	6000	63	1:1	72	-	esterna extern	05122500
	ASSIALE AXIAL $r_1 = r_2$	ISO-BT 30	6000	63	1:1	72	-	int. / est. int. / ext.	05122600
	LT-A OFS	ER32-F (Ø 3-20)	6000	50	1:1	86	-	esterna extern	05122100
	ASSIALE AXIAL $r_1 = r_2$	ER32-F (Ø 3-20)	6000	50	1:1	86	-	int. / est. int. / ext.	05122000
	LT-T	ER16-F (Ø 1-10)	4000	13	1:1	132	-	esterna extern	05102000
	ASSIALE AXIAL RADIALE RADIAL r_1 contrario umgekehrt r_2								

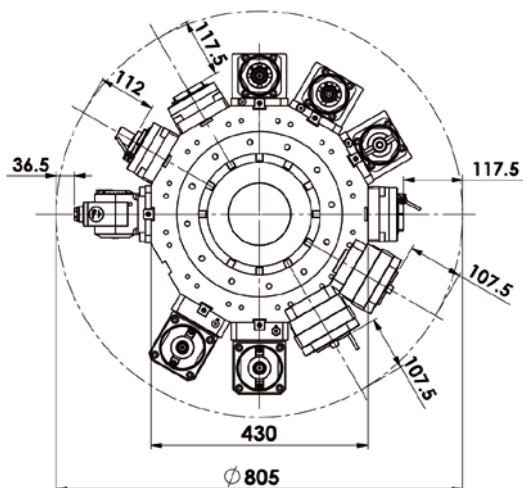
HYUNDAI - KIA

MODELLO TORNO
MASCHINEN MODELL


SKT 400 LMC / SKT V80 RM

BMT - 75




MANDRINO PRINCIPALE
HAUPTSPINDEL







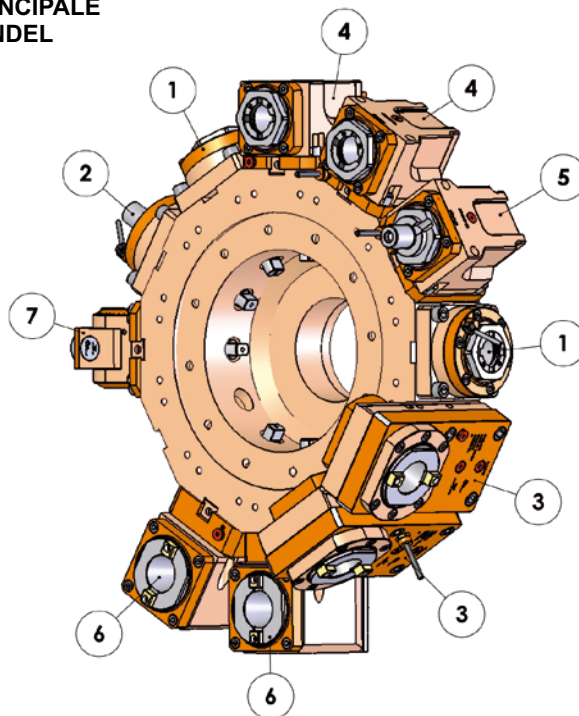DIAMETRO ROTAZIONE MAX
MAX. ROTATIONS-DURCHMESSER / SCHWINGKREIS



F: GHIERA INTERNA / INTERNE SPANNZANGE

MODELLO MODELL	LAVORAZIONE OPERATION	PINZA SPANNZANGE	VELOCITÀ (giri/min) DREHZAHL (U/Min.)	COPPIA DREHMOMENT (Nm)	RAPPORTO ÜBERSETZUNG	H (mm)	LUNGHEZZA UTENSILE WERKZEUGLÄNGE	REFRIGERAZIONE KÜHLSCHMIER- MITTEL	CODICE TEILE NUMMER
1 	LT-S RADIALE RADIAL $r_1 = r_2$	ER40-F (Ø 4-26)	4000	100	1:1	70	117.5	esterna extern	05123100
		ER40-F (Ø 4-26)	4000	100	1:1	70	117.5	int. / est. int. / ext.	05123200
2 	LT-S RADIALE RADIAL $r_1 = r_2$	DIN 138-27 (Ø 27)	4000	100	1:1	75.5	112	esterna extern	05123600
3 	LT-S OFS RADIALE RADIAL r_1 contrario umgekehrt r_2	ISO-BT 40	4000	180	1:1	80	107.5	esterna extern	05123800
		ISO-BT 40	4000	180	1:1	80	107.5	int. / est. int. / ext.	05123700

MODELLO MODELL	LAVORAZIONE OPERATION	PINZA SPANNZANGE	VELOCITÀ (giri/min) DREHZAHL (U/Min.)	COPPIA DREHMOMENT (Nm)	RAPPORTO ÜBERSETZUNG	H (mm)	LUNGHEZZA UTENSILE WERKZEUGLÄNGE	REFRIGERAZIONE KÜHLSCHMIER- MITTEL	CODICE TEILE NUMMER
4 	LT-A	ER40-F (Ø 4-Ø 26)	4000	80	1:1	60	-	esterna extern	05123300
	ASSIALE AXIAL $r_1 = r_2$	ER40-F (Ø 4-Ø 26)	4000	80	1:1	60	-	int. / est. int. / ext.	05123400
5 	LT-A	DIN 138-27 (Ø 27)	4000	80	1:1	60	-	esterna extern	05123500
6 	LT-A	ISO-BT 40	4000	180	1:1	90	-	esterna extern	05123900
	ASSIALE AXIAL $r_1 = r_2$	ISO-BT 40	4000	180	1:1	90	-	int. / est. int. / ext.	05124000
7 	LT-T	ER20-F (Ø 2-13)	3000	20	1:1	151	36.5	esterna extern	05124500
	ASSIALE AXIAL RADIALE RADIAL r_1 contrario umgekehrt r_2								

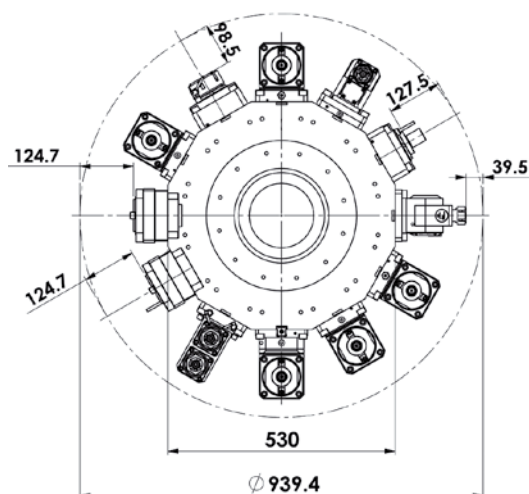
HYUNDAI - KIA

MODELLO TORNIO
MASCHINEN MODELL


SKT 700 LM

BMT - 85

MANDRINO PRINCIPALE
HAUPTSPINDEL









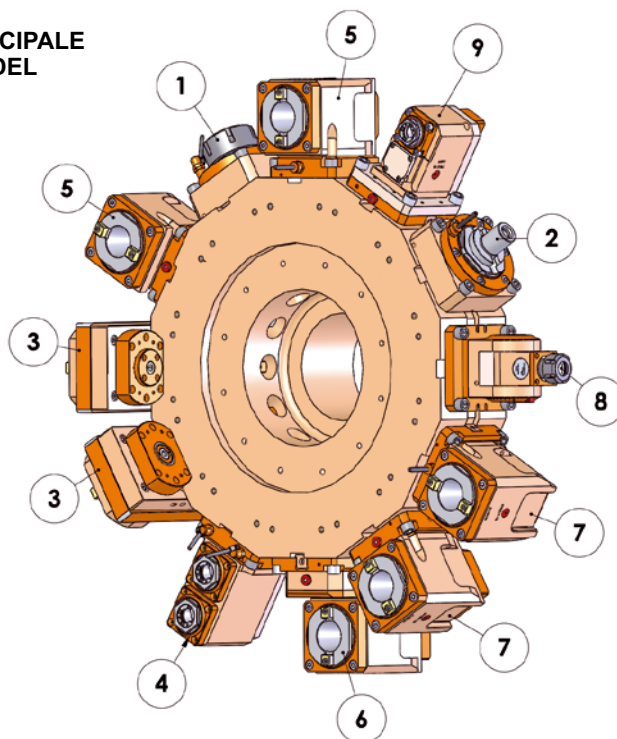DIAMETRO ROTAZIONE MAX
MAX. ROTATIONS DURCHMESSER / SCHWINGKREIS



F: GHIERA INTERNA / INTERNE SPANNZANGE

MODELLO MODELL	LAVORAZIONE OPERATION	PINZA SPANNZANGE	VELOCITÀ (giri/min) DREHZAHL (U/Min.)	COPPIA DREHMOMENT (Nm)	RAPPORTO ÜBERSETZUNG	H (mm)	LUNGHEZZA UTENSILE WERKZEUGLÄNGE	REFRIGERAZIONE KÜHLSCHMIER- MITTEL	CODICE TEILE NUMMER
1 NEW	LT-S RADIALE RADIAL $r_1 = r_2$	ER50 (Ø 7-34)	4000	100	1:1	106	98.5	esterna extern	05124600
		ER50 (Ø 7-34)	4000	100	1:1	106	98.5	int. / est. int. / ext.	05124700
2 NEW	LT-S RADIALE RADIAL $r_1 = r_2$	DIN 138-32 (Ø 32)	4000	100	1:1	77	127.5	esterna extern	05125000
3 NEW	LT-S OFS RADIALE RADIAL r_1 contrario umgekehrt r_2	ISO-BT 40	4000	180	1:1	80	124.7	esterna extern	05125300
		ISO-BT 40	4000	180	1:1	80	124.7	int. / est. int. / ext.	05125200

MODELLO MODELL	LAVORAZIONE OPERATION	PINZA SPANNZANGE	VELOCITÀ (giri/min) DREHZAHL (U/Min.)	COPPIA DREHMOMENT (Nm)	RAPPORTO ÜBERSETZUNG	H (mm)	LUNGHEZZA UTENSILE WERKZEUGLÄNGE	REFRIGERAZIONE KÜHLSCHMIER- MITTEL	CODICE TEILE NUMMER
4 	LT-A ASSIALE AXIAL $r_1 = r_2 = r_3$	ER25-F (Ø 2-16)	6000	40	1:1	70	-	esterna extern	05125700
9 	LT-A ASSIALE AXIAL $r_1 = r_2$	ER20-F (Ø 2-13)	in / eing. 5000 out / ausg. 10000	in / eing. 50 out / ausg. 25	1:2	115	-	int. / est. int. / ext.	05125800
5 	LT-A ASSIALE AXIAL $r_1 = r_2$	ISO-BT 40	4000	180	1:1	85	-	esterna extern	05124800
		ISO-BT 40	4000	180	1:1	85	-	int. / est. int. / ext.	05124900
6 	LT-A OFS ASSIALE AXIAL $r_1 = r_2$	ISO-BT 40	4000	180	1:1	110	-	int. / est. int. / ext.	05125600
7 	LT-A ASSIALE AXIAL $r_1 = r_2$	ISO-BT 40	in / eing. 4000 out / ausg. 2000	in / eing. 60 out / ausg. 120	2:1	85	-	esterna extern	05125400
		ISO-BT 40	in / eing. 4000 out / ausg. 2000	in / eing. 60 out / ausg. 120	2:1	85	-	int. / est. int. / ext.	05125500
8 	LT-T ASSIALE AXIAL RADIALE RADIAL r_1 contrario umgekehrt r_2	ER25 (Ø 2-16)	3000	20	1:1	165	39.5	esterna extern	05125100